



MATERIAL & FINISH DATA				
COMPONENT	ASTM DESIGNATION	MIN. YIELD (KSI)	SYSTEM:	CUSTOMER SPECIFIED LIQUID (ALTERNATE) HOT-DIP GALVANIZED TO ASTM A123
POLE BASE	A595 GR. A	55	BASE COAT:	ASTM A123
ARM SHAFT	A595 GR. A	55	PRIME COAT:	POLYAMIDAMINE OR POLYAMIDE EPOXY
BASE PLATE	A36	36	FINISH COAT:	ALIPHATIC ACRYLIC POLYURETHANE
*ANCHOR BOLTS	F1554 GR. 55	55	COLOR:	Dark Bronze
T-BASE CONN. BOLTS	A325		SPEC:	1-3000

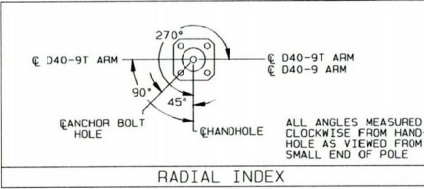

POLE AND ARM DATA													
TYPE	QTY.	POLE TUBE				POLE BASE				ANCHOR BOLT			
		BASE DIA. (IN)	TOP DIA. (IN)	LENGTH (FT)	GAUGE OR THK (IN)	SQUARE S (IN)	BOLT CIRCLE "Y" (IN)	THK. "M" (IN)	HOLE "Z" (IN)	DIA. "K" (IN)	LENGTH "J" (IN)	HOOK "H" (IN)	THREAD LENGTH "U" (IN)
D40-9T		8.64	4.72	28.00	11	13.13	13.50	1.25	1.25	1.00	36.00	4.00	6.00
D40-9		8.64	4.72	28.00	11	13.13	13.50	1.25	1.25	1.00	36.00	4.00	6.00

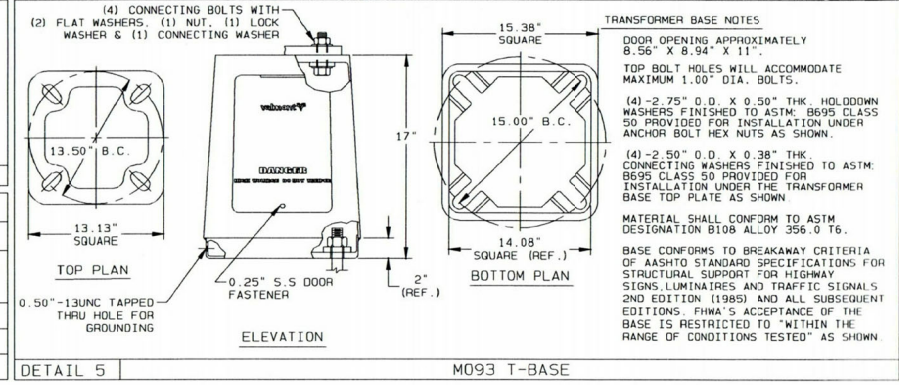

*** IMPORTANT NOTE ***

1. WRITTEN CONFIRMATION MUST BE PROVIDED CONFIRMING ALL MOUNTING HEIGHTS, ORIENTATIONS, & FINISH PRIOR TO RELEASE FOR PRODUCTION.
2. BLACK COAT AND FINISH IS ONLY TO BE USED IF POLES ARE LOCATED IN THE ENTERTAINMENT DISTRICT OVERLAY OR THE DOWNTOWN OVERLAY
3. ALL POLE TO BASE CONNECTING HARDWARE IS TO BE SUPPLIED WITH T-BASES

VALMONT INDUSTRIES, INC. RESERVES THE RIGHT TO INSTALL VARIOUS ENGINEER APPROVED, MATERIAL HANGING ACCOMMODATIONS TO FACILITATE THE MANUFACTURING PROCESS.		valmont Valley, NE 68064 (402) 359-2201		ORDER NUMBER: 000001-01 PAGE NUMBER: 1 OF 1 DRAWING NUMBER: TX399314P1	REV
--	--	--	--	--	-----

REV	DATE	BY	DATE	DESCRIPTION
---	04/19/18	---	04/19/18	---

CITY OF ARLINGTON, TEXAS		
40FT Single & Double Davit Poles with Base		
DATE:	SCALE: NTS	SHEET 1 OF 1
DESIGNED BY:	DRAWN BY:	CHECKED BY:

5/4/23